



OFF-STREET PARKING PERMIT REQUIREMENT

- Aprons are required whenever off-street parking is constructed.
- All curb-cutting requirements must be met when installing off-street parking.
- The off-street parking and the “sidewalk” portion on the parking site, must be constructed as to support the weight of a vehicles.
- Where a sidewalk has been removed, destroyed or never existed, and where motorized vehicles access property from a public street through a Borough right-of-way for purposes of off-street parking, a concrete or otherwise durable apron capable of supporting automobiles and trucks shall be constructed at the sole expense of the property owner.....Chapter 125, Section 125-10

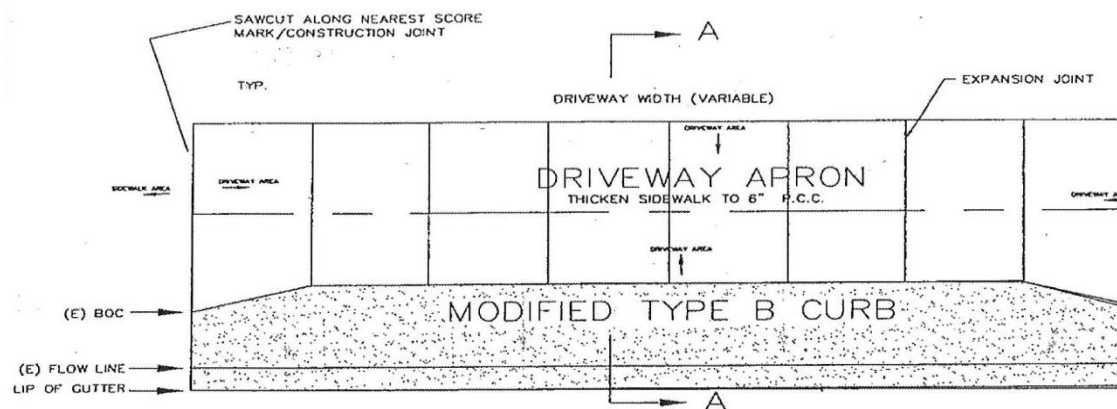

PLAN

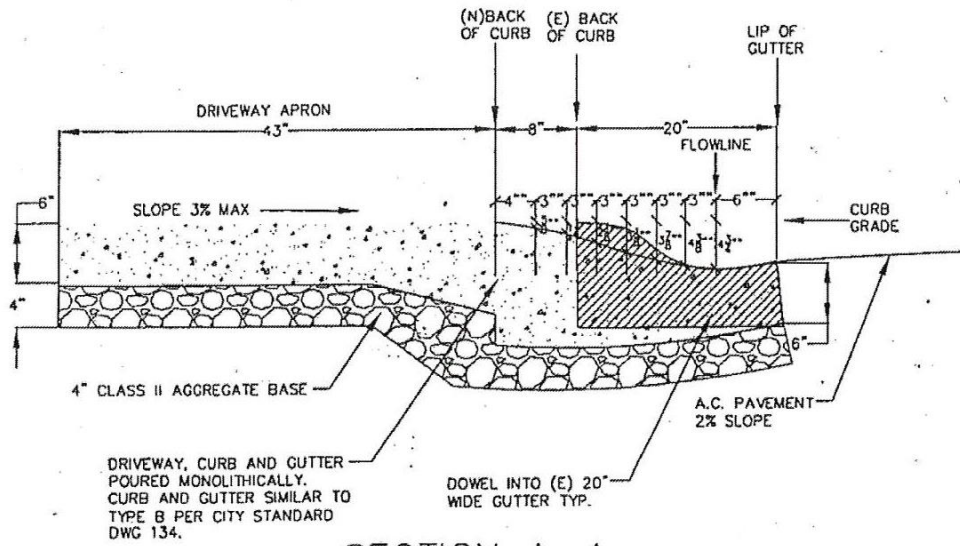

SECTION A-A

NOTES

1. USE 1/2" WIDE EXPANSION JOINTS AT EACH END OF CURB RETURNS AND APPROX. 60' CENTERS.
2. USE TWO 1/2" DIAM. BY 12" LONG, SMOOTH, CAPPED DOWELS AT EACH EXPANSION JOINT AND AT END OF POURS.
3. MARK SCORE MARKS 1 1/2" TO 2" DEEP AT 20' CENTERS.
4. SURFACE FINISH TO BE LIGHT BROOMING.
5. DRIVEWAY, CURB AND GUTTER SHALL BE POURED PER SECTION 02515 OF SPECIFICATIONS.